Micro-MaTch Box Plug IDC Type

SPECIFICATION
Current Rate:1.0 AMP
Insulation Resistance:100MΩ Min
Contact Resistance:20mΩ Max
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL
Insulator:Polyester,UL 94V-0
Standard:Nylon 46
Contact Pin:Copper Alloy

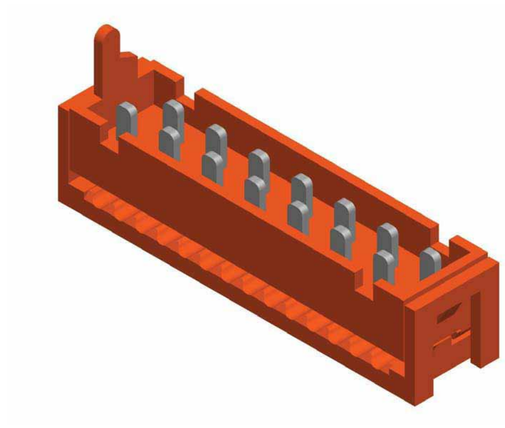

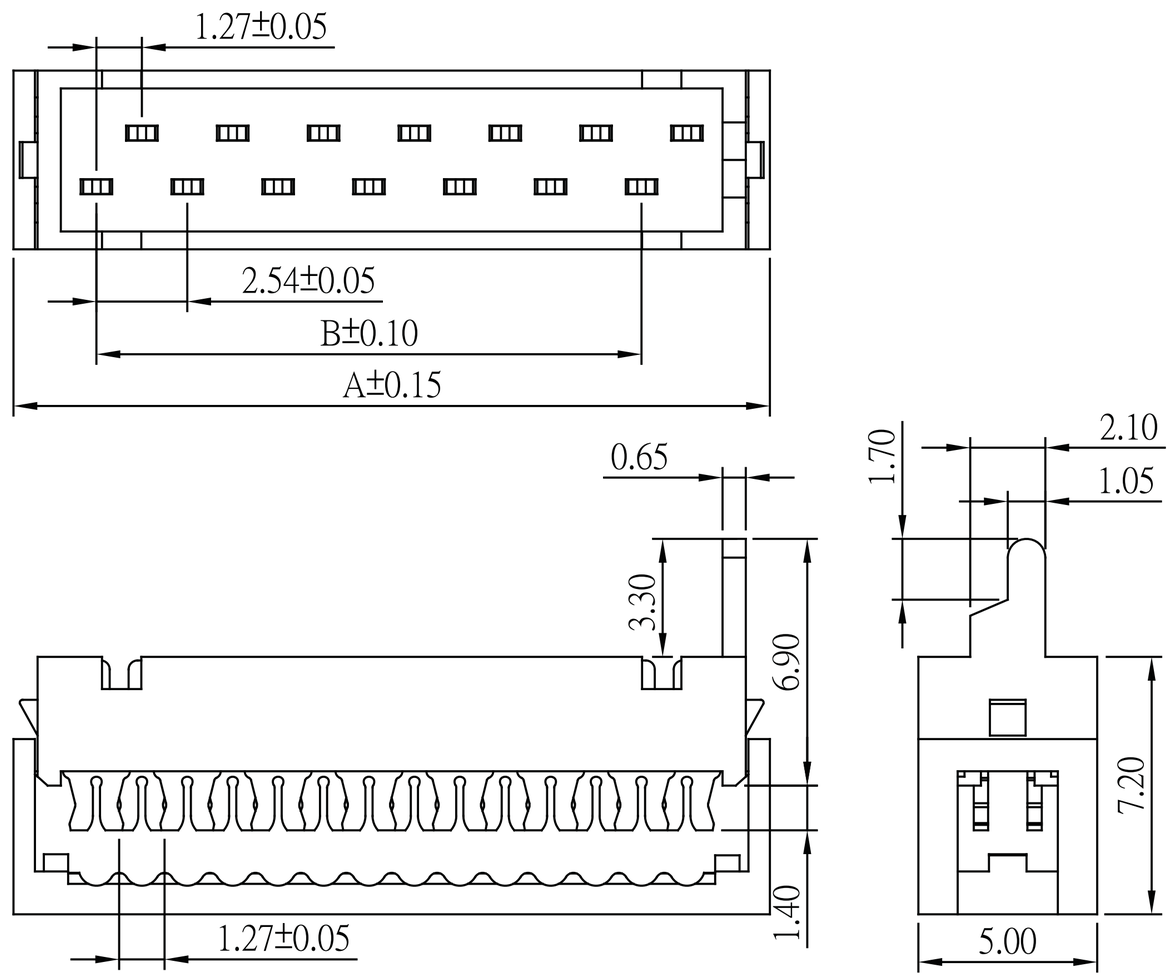

Mate with flat cable Pitch 1.27 mm

No. of Contacts	Dim. A	Dim. B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

Part No.:MIBPI3-XX-TR-U

Micro-MaTch Dip Plug IDC Type

SPECIFICATION
Current Rate:1 AMP
Insulation Resistance:100MΩ Min
Contact Resistance:20mΩ Max
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL
Insulator:Polyester,UL 94V-0
Standard:Nylon 46
Contact Pin:Copper Alloy

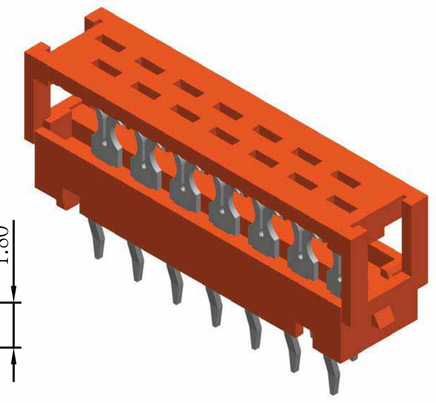

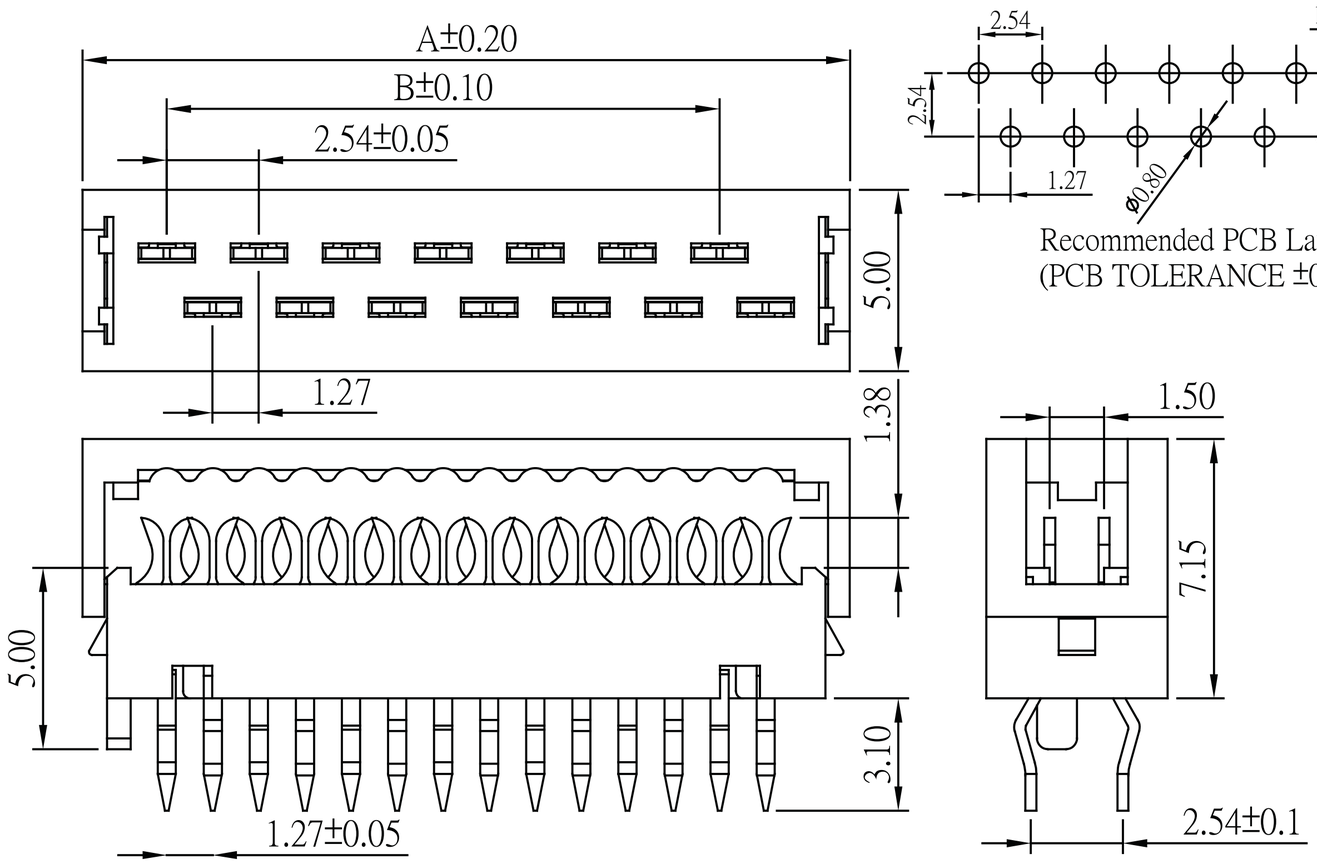

Mate with flat cable Pitch 1.27 mm

No. of Contacts	Dim. A	Dim. B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

Part No.:MIDPI3-XX-TR-U

ORDER INFORMATION

M I X P I 3 - X X T R ☐ U

- X: BP:Box Plug IDC / DP:Dip Plug IDC
- XX: No. of Contacts
- T: T:Tin Plated
- R: R:Red Insulator
- U: U:RoHS + Nylon 46

Radiotech-trade

Tel.: (+7 495) 795-08-05
E-mail: info@rct.ru
Web: www.rct.ru